




# Azpen A701 Charger Port Replacement

This guide walks you through replacing the charger port.

Written By: Michael

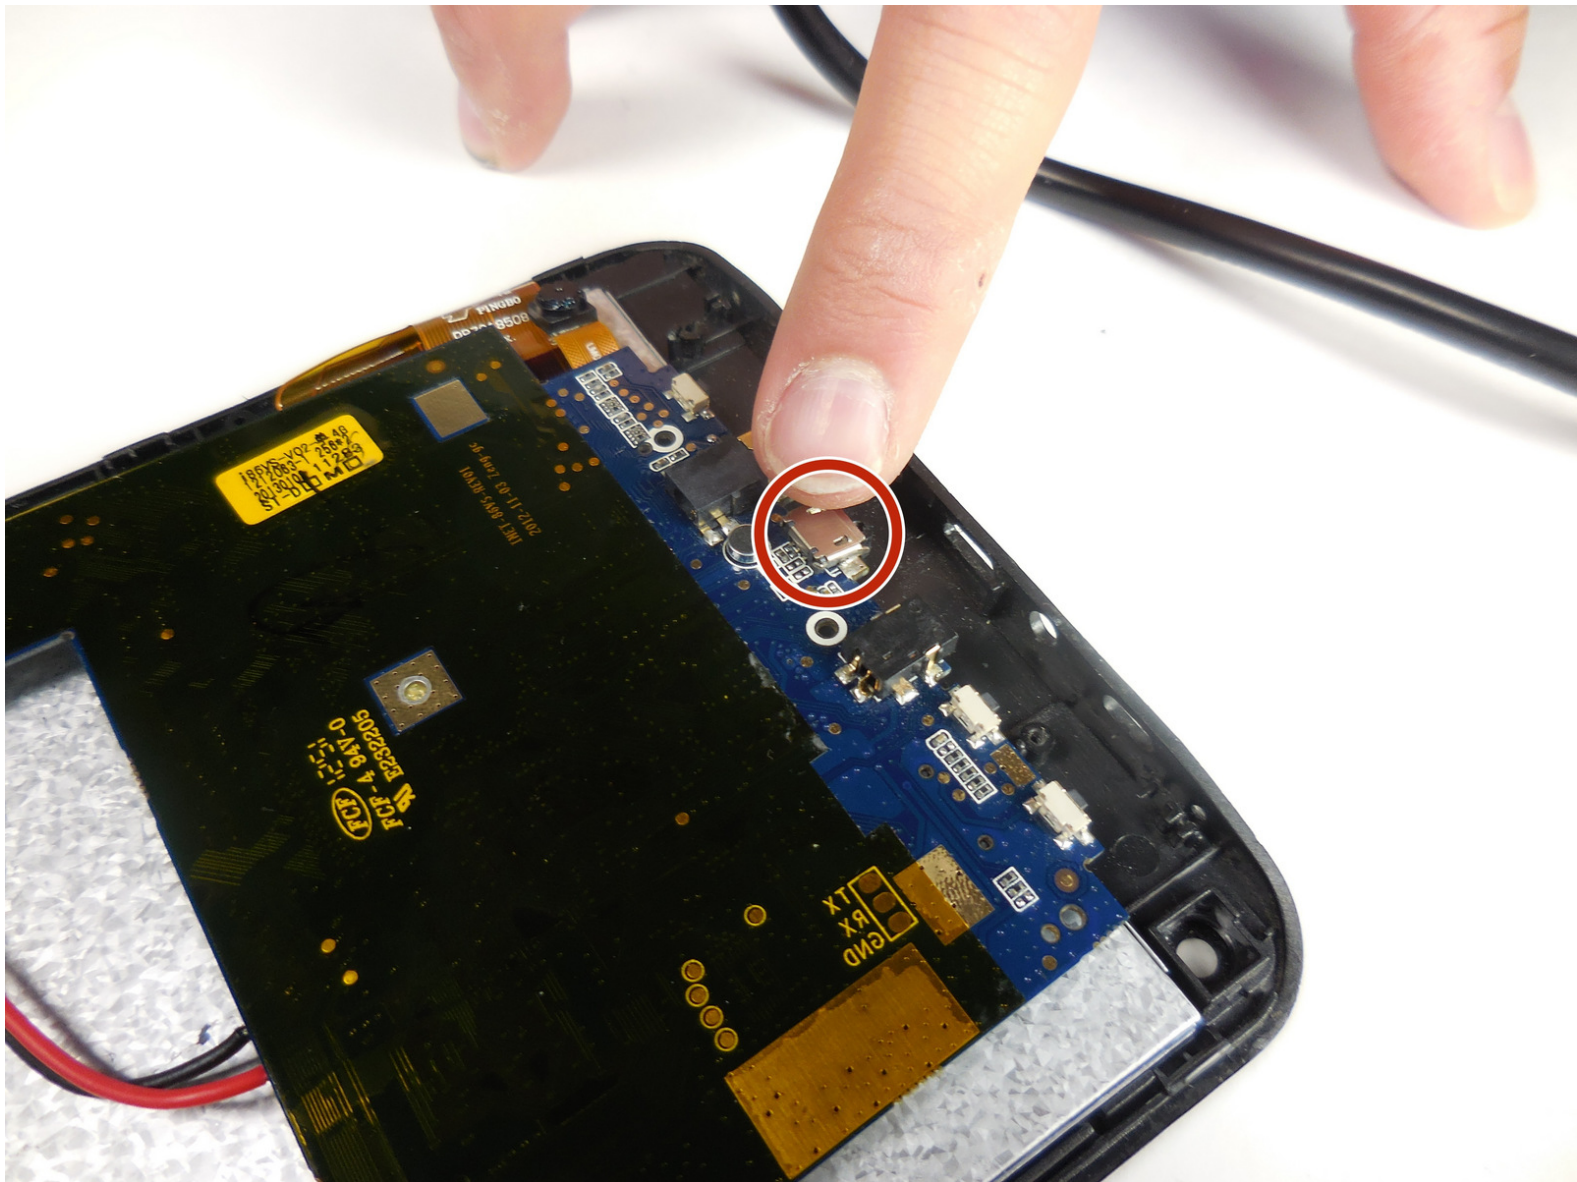

## INTRODUCTION

The charger port is located on the motherboard (the blue L-shaped piece) at the bottom of the device. In order to replace the port, a soldering kit is needed. Be sure you have all the necessary tools and safety equipment on hand before starting.

A guide to soldering can be found on iFixit's website [here](#).

---



### TOOLS:


- [Phillips #00 Screwdriver](#) (1)
  - [Spudger](#) (1)
  - [Soldering Workstation](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — General Disassembly Prerequisite Guide



- Remove the two 2cm screws on the bottom using the PH0 Phillips head screw driver.

## Step 2

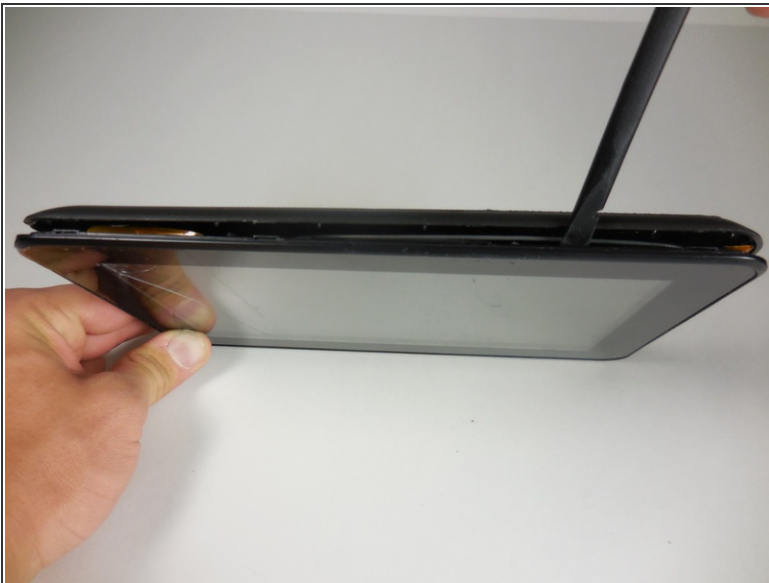

- Pry open back piece with plastic spudger.
  - Remove the back piece of the device.
- i** The back panel may be difficult to pry off, use gentle force.




## Step 3




- Disconnect speaker (which is attached by black and red wires) from back piece using plastic spudger.

## Step 4

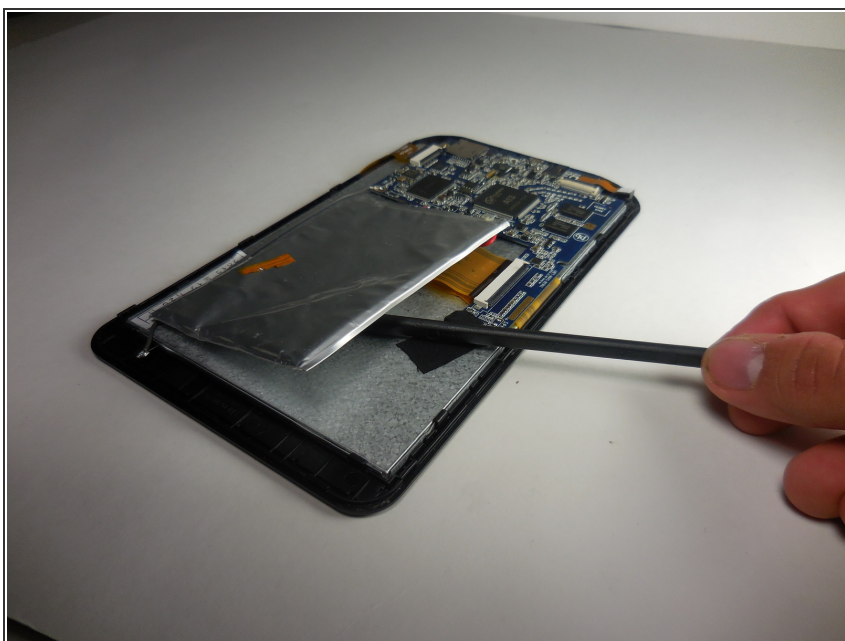


- Gently pry the battery off of the device with the plastic spudger.
- ⓘ There is a large amount of glue holding the battery to the device.
- ⚠ Do not puncture the battery with the plastic spudger.

## Step 5 — Charger Port

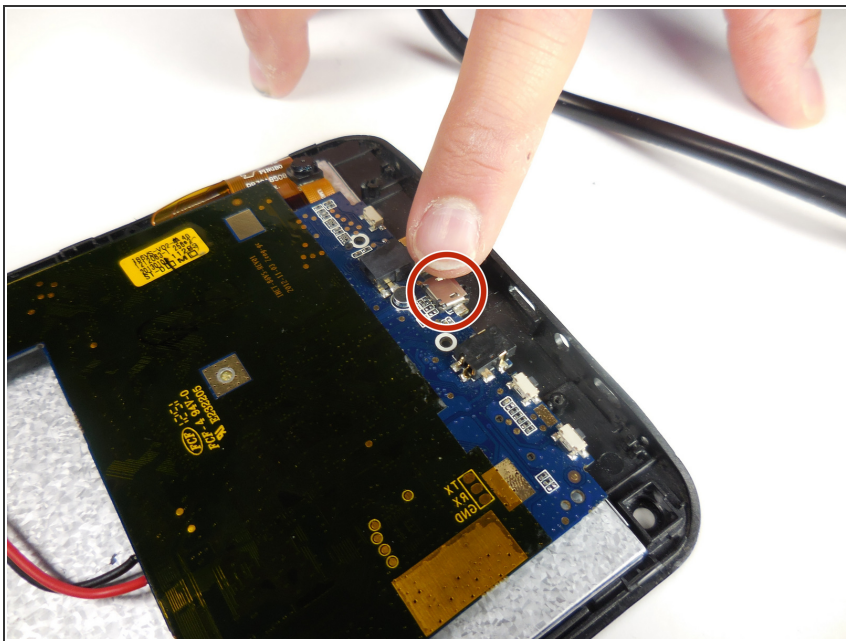


- The charger port is located on the underside of the motherboard (as pictured).

## Step 6

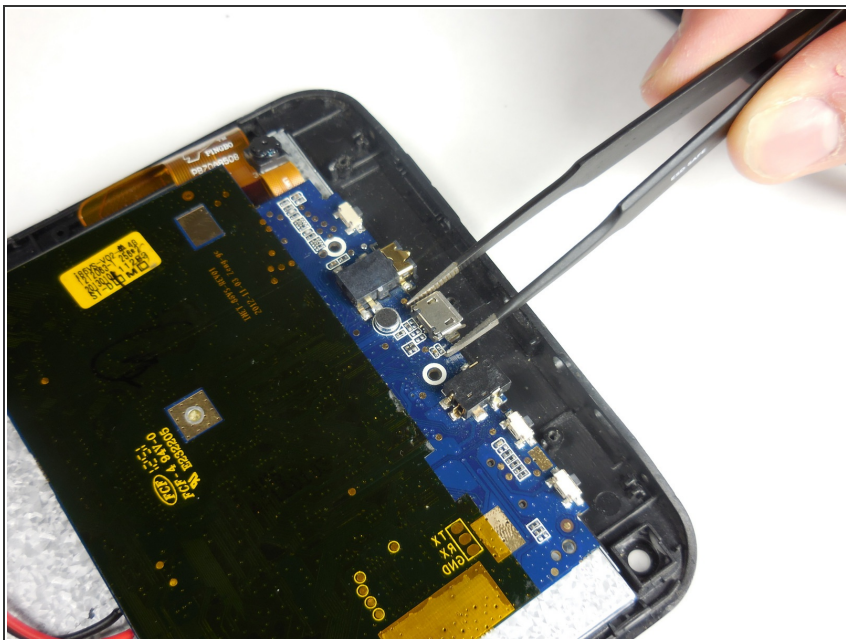

- Remove the charger port by using tweezers and gently pulling.

## Step 7

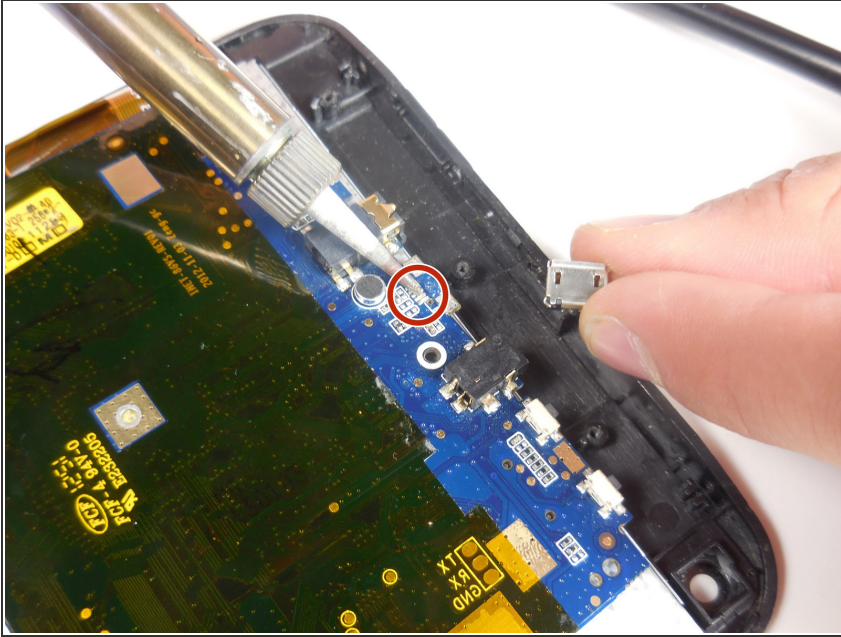

- Solder and place new charger port.

To reassemble your device, snap back piece on to the front piece and screw in both 2cm screws at the bottom.

This document was last generated on 2017-06-23 05:35:43 PM.